

MAXIMIZING SHELF LIFE

PRODUCT STORAGE GUIDE

Underlying Metallurgy

As storage time lengthens, the effects of age hardening and strain relieving increase, thereby altering the material's physical characteristics. Material that has been heat-treated is less susceptible to these changes, but, due to the high purity of the metals, even these materials will experience changes to mechanical properties overtime.

Changes to surface conditions. As storage time lengthens, especially under conditions of high temperature and humidity, the surface of the metal, or the flux coating (if present), will increasingly react with water vapor.

Packaging

COINING offers many different packaging options with varying levels of protection.

Consult with your Sales Representative, or the COINING Applications Engineering team, to determine the optimum package for your application. Consideration should be given to the alloy, anticipated storage conditions, anticipated storage time, and cost.


Storage Conditions

Maintain product unopened, in its original packaging, until needed for use. COINING recommends storage of unopened products at a temperature between 18 °C and 24 °C with relative humidity less than 60%. When possible, storage in a dry box (nitrogen) is suggested.

After opening and use, unused product should be returned to the original packaging and stored in a dry box (nitrogen) as soon as possible.

Shelf Life

Keeping in mind the aforementioned, and unless otherwise specified on the labeling or other documentation, the shelf life of COINING product is 1 year from the date of shipment.

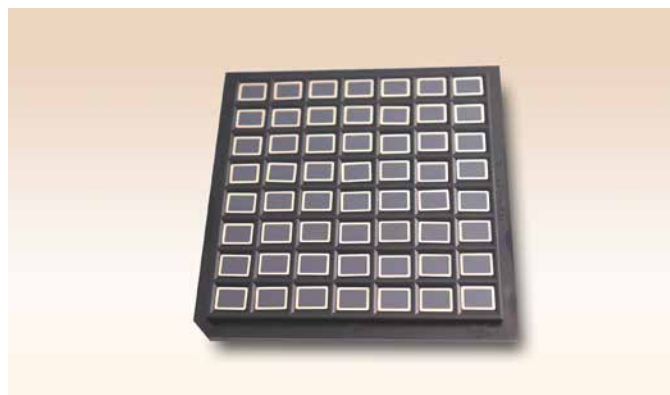

Contact Us

Ask An Engineer a technical question, by simply scanning the QR code and drop us a line.



AMETEK COINING

15 Mercedes Drive, Montvale, NJ 07645, United States

E: coining.info@ametek.com | T: +1 201 791 4020

www.ametek-coining.com

